


Typ MF4 – Zylinder mit Fußflanschbefestigung

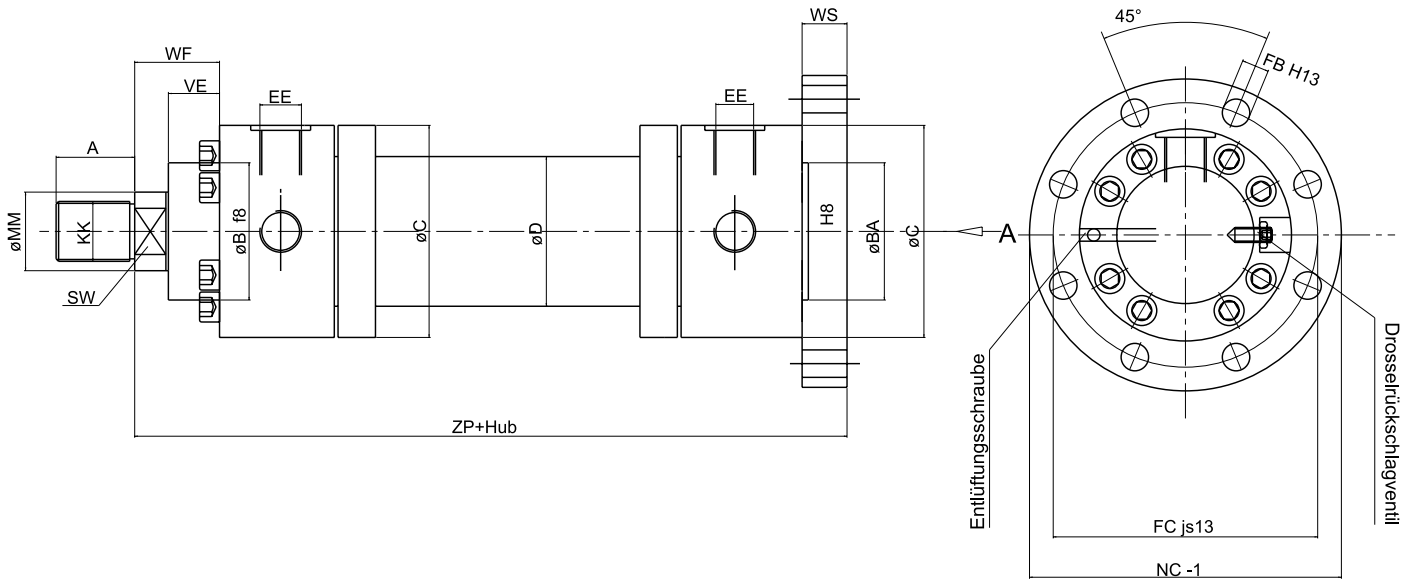

Kolbendurchmesser	50		63		80		100		125		140		160		180		200		250		
øMM (Kolbenstangen)	32	36	40	45	50	56	63	70	80	90	90	100	110	110	125	125	140	160	180		
4 (Flächenverhältnis)	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	1,6:1	2:1	
EE (Metrisches Gewinde)	M22x1,5		M27x2		M27x2		M33x2		M33x2		M42x2		M42x2		M42x2		M42x2		M50x2		
EE (Whitworth-Rohrgew.)	G1/2		G3/4		G3/4		G1 G1		G11/4		G11/4		G11/4		G11/4		G11/2				
KK (Kolbenstangengewinde)	M27x2		M33x2		M42x2		M48x2		M64x2		M72x3		M80x3		M90x3		M100x3		M125x4		
SW (Schlüsselweite)	27	30	32	36	41	46	50	60	65	75	75	85	85	95	95	115	115	120	140	160	
Befestigungsschrauben	M10		M10		M12		M16		M16		M20		M20		M24		M24		M30		
ZJ/ZB (+Hub)	240		270		300		335		390		430		460		500		540		640		
XC/XQ (+Hub)	305		348		395		442		520		575		617		685		756		903		
ZP (+Hub)	256		298		332		371		430		470		505		550		596		703		
XV** (+Hub/2)	143,5		161,5		180,0		199,0		233,0		250,5		272,5		297,5		320,5		376,5		
A	36		45		56		63		85		90		95		105		112		125		
øB f8	63		75		90		110		132		145		160		180		200		250		
øC***	110		125		145		170		215		255		270		305		320		400		
øCDH9/øCX H7	32		40		50		63		80		90		100		110		125		160		
øD***	60		78		100		120		150		170		190		219		244,5		298,5		
EWh12/EXh12	32		40		50		63		80		90		100		110		125		160		
øFB h13	13,5		13,5		17,5		22		22		26		26		33		33		39		
øFC je13	132		150		180		212		250		300		315		365		385		475		
L/LT	65		78		95		107		130		145		157		185		216		263		
MR-1/MS-1	40		50		60		70		90		100		110		120		135		170		
NC-1***	155		175		210		250		290		340		360		420		440		540		
øTD16	32		40		50		63		80		90		100		110		125		160		
TL je16	25		32		40		50		63		70		80		90		100		125		
TM h13	112		125		150		180		224		265		280		320		335		425		
VD	4		4		4		5		5		5		5		5		5		8		
VE	29		32		36		41		45		45		50		55		61		71		
WC	22		25		28		32		36		36		40		45		45		50		
WF	47		53		60		68		76		76		85		95		101		113		
WS***	25		28		32		36		40		40		45		50		56		63		
Z	4°		4°		4°		4°		4°		4°		4°		4°		4°		4°		
zulässiger Hub in mm																					
	50	1073	1404	1348	1758	1675	2159	2159	2725	2810	3637	3190	4015	3445	4243	3697	4888	4325	5534	5723	7378
	100	709	943	895	1185	1118	1460	1452	1852	1898	2483	2159	2743	2331	2896	2499	3342	2933	3788	3899	5069
Betriebsdruck in bar	150	547	783	695	931	872	1151	1139	1466	1493	1971	1702	2179	1838	2299	1969	2656	2316	3014	3090	4046
	200	450	616	575	780	725	966	952	1235	1252	1666	1430	1843	1544	1943	1652	2248	1948	2553	2608	3436
	250	385	533	493	677	624	841	824	1078	1088	1458	1244	1613	1343	1700	1436	1969	1698	2238	2279	3020